


# MAX485

## MAX485 TTL TO RS485 Converter Module

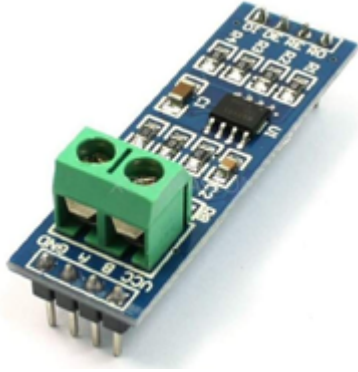

- On-board MAX485 chip, A low power consumption for the RS-485 communication, slew-rate limited transceiver.
- A low power consumption for the RS-485 communication
- Onboard then 5.08 (mm) pitch 2P terminal to facilitate RS-485 communication wiring.
- Slew-rate limited transceiver
- All pins of the chip have been lead to can be controlled through the microcontroller.
- Convenient RS-485 communication wiring
- Multiple Units can be connected to the same RS-485 bus wiring.
- All Chip pins are brought out for proper controls