


T7498

XM-M510 DC 14-32V HIGH POWER DIG POWER AMP BOARD

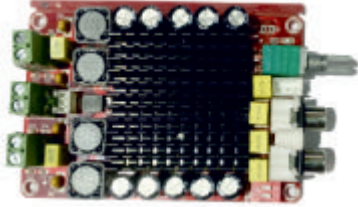

- Output power:100w+100w (VCC+32V,RL=4ohm,THD=10%)
- Wide:14-30v signal power supply
- Level 4 gain optional:(21.6dB,27.6dB,31.1dB,33.1dB)
- Using differential input to reduce common-mode noise significantly
- Has the pattern of the fault and silent mode
- With intelligent protection function
- Have overheating protection function
- The input voltage: DC14-32 v
- Output power:100W*2
- Output resistance:4-8ohm
- Line type:D types
- Chip:TDA7498
- Harmonic distortion:Po=1W/0.05%
- Frequency response range:18-100KHZ
- Switching frequency:360KHz
- Signal to noise ratio:110db
- Product size:about(L*W)?9.4*6.2cm/3.7*2.44inch